


Florina<sup>®</sup>  
CERAMICS  
- SINCE 2008 -

ROVERE

Excellence  
In Details



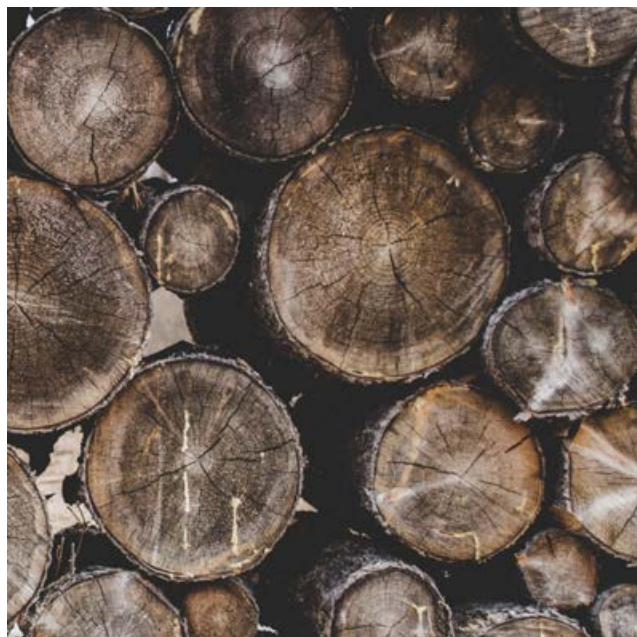

Excellence  
In Details

New  
Product



---

Rovere



Rovere




Bianco









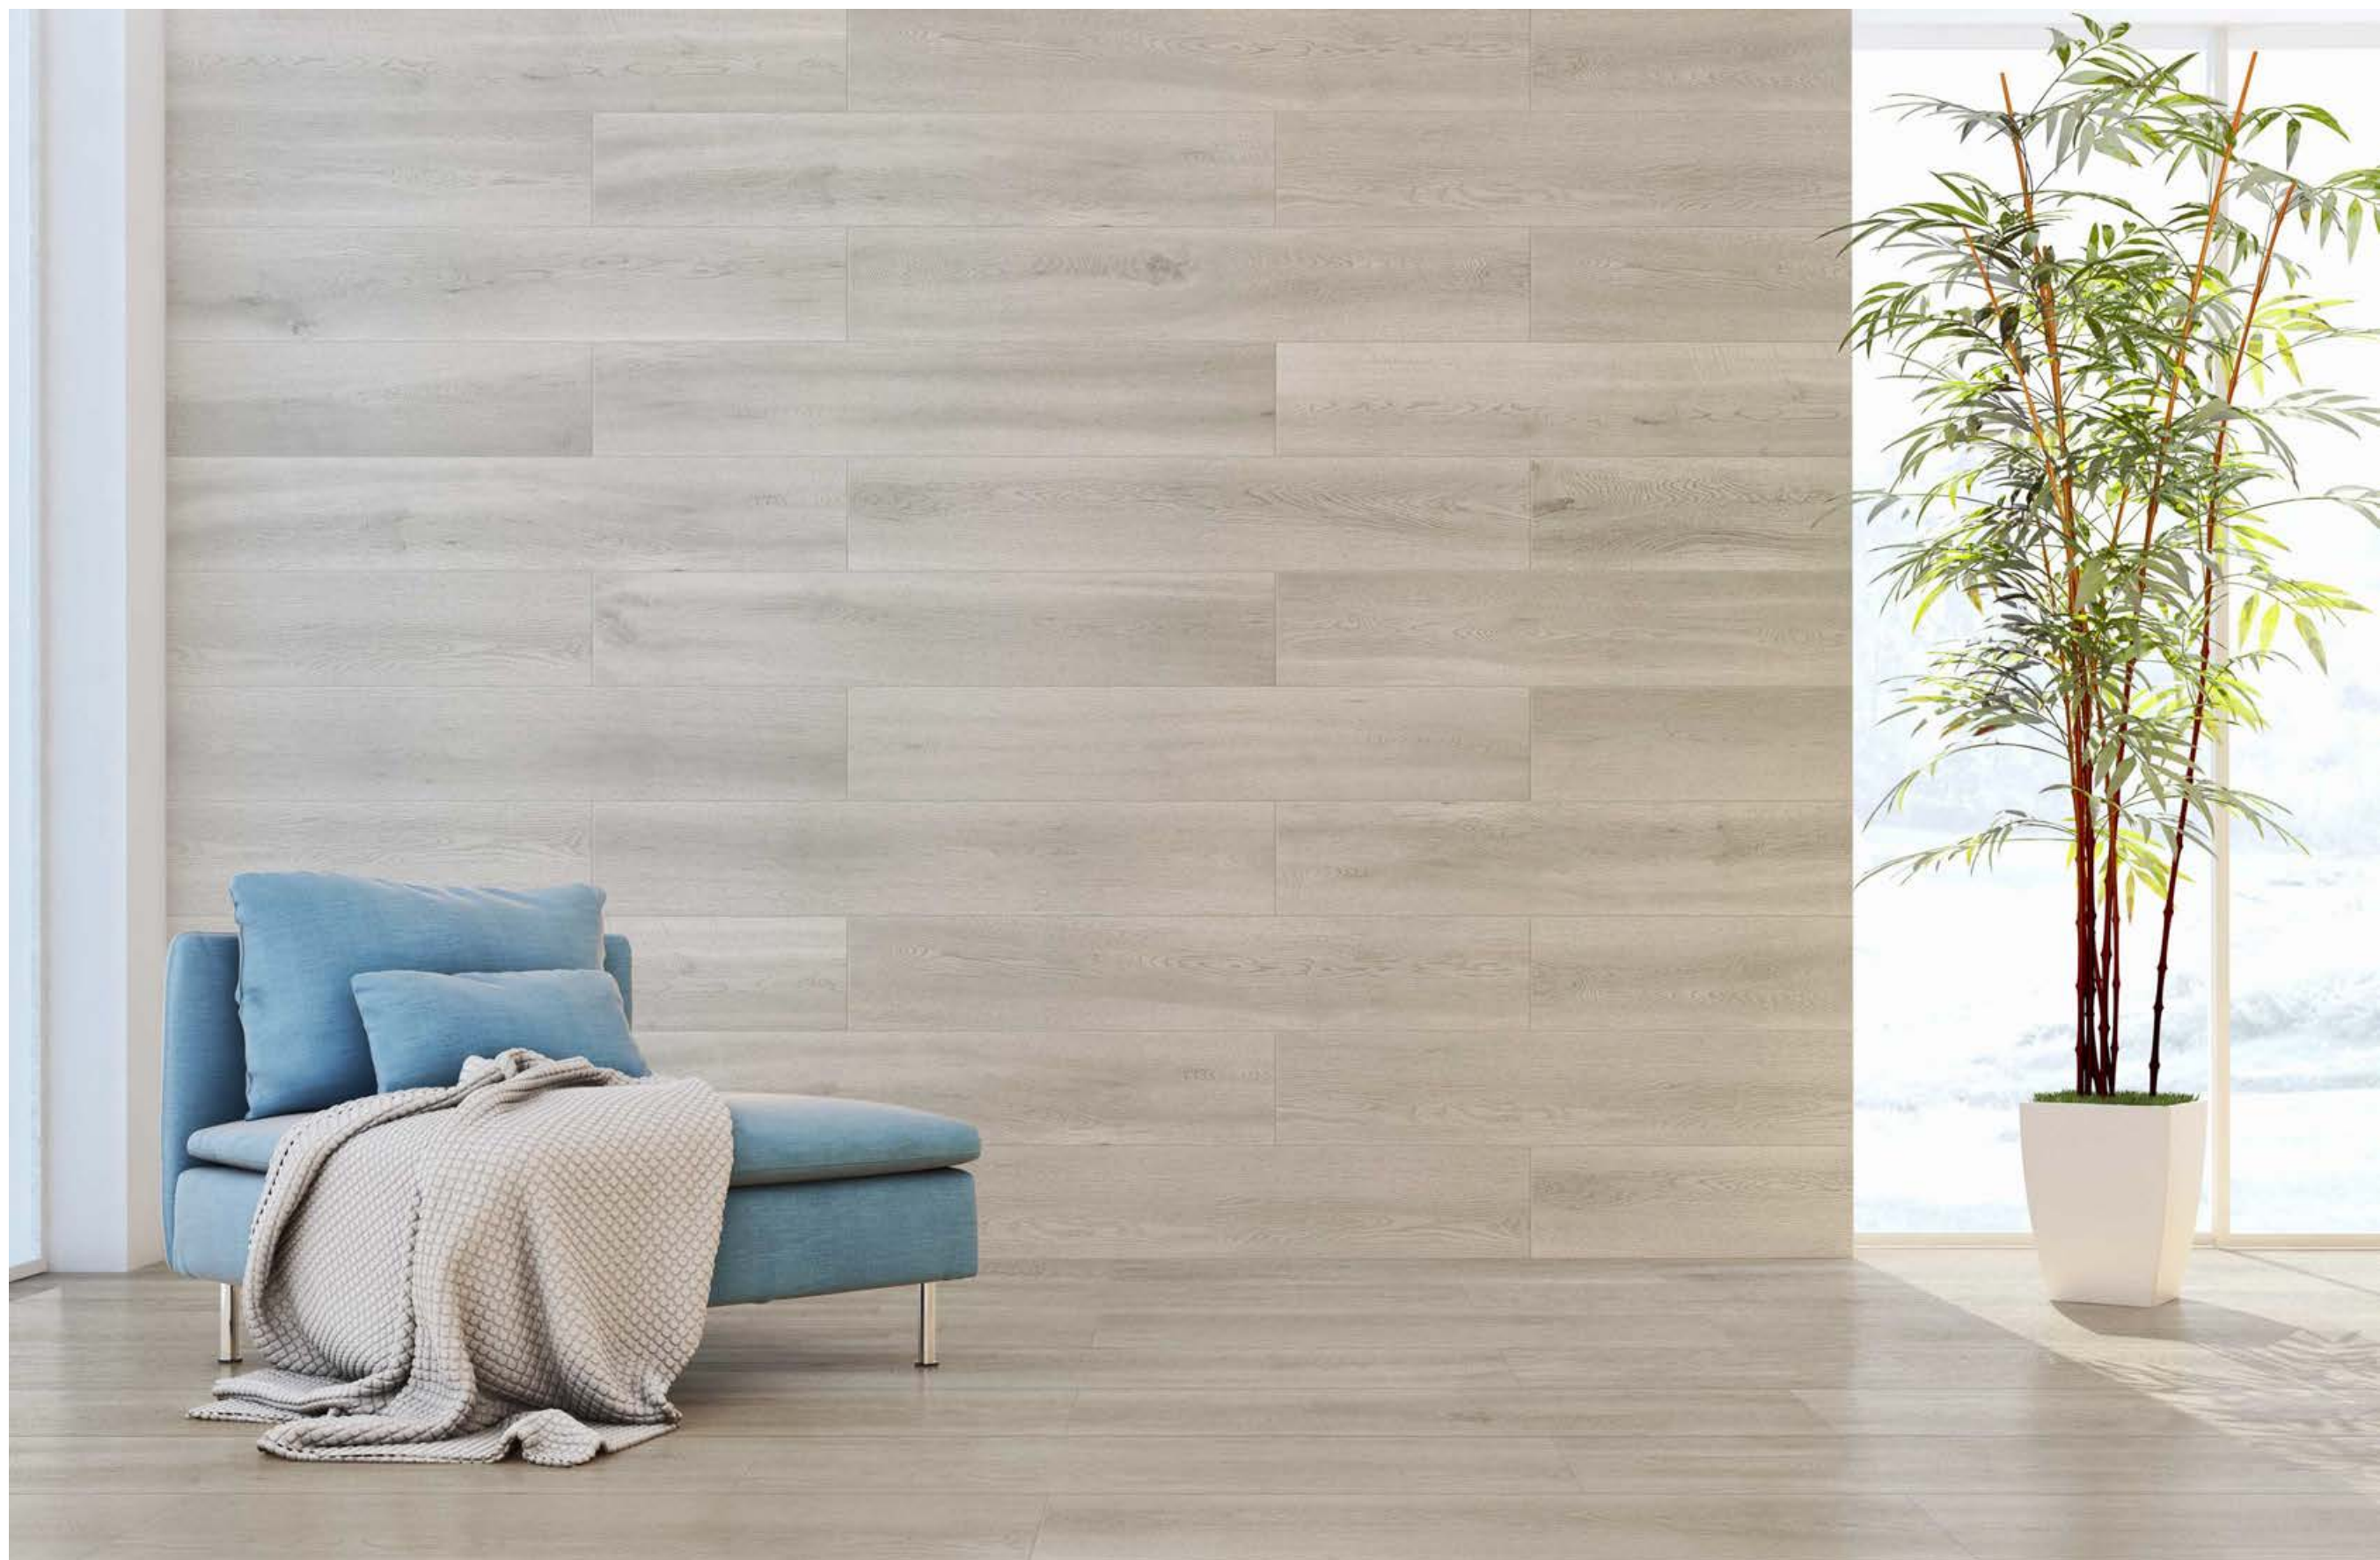


Floor  
R1 | 200x1200mm/8"x48"

Wall  
R1 | 200x1200mm/8"x48"



Floor  
R1 | 200x1200mm/8"x48"

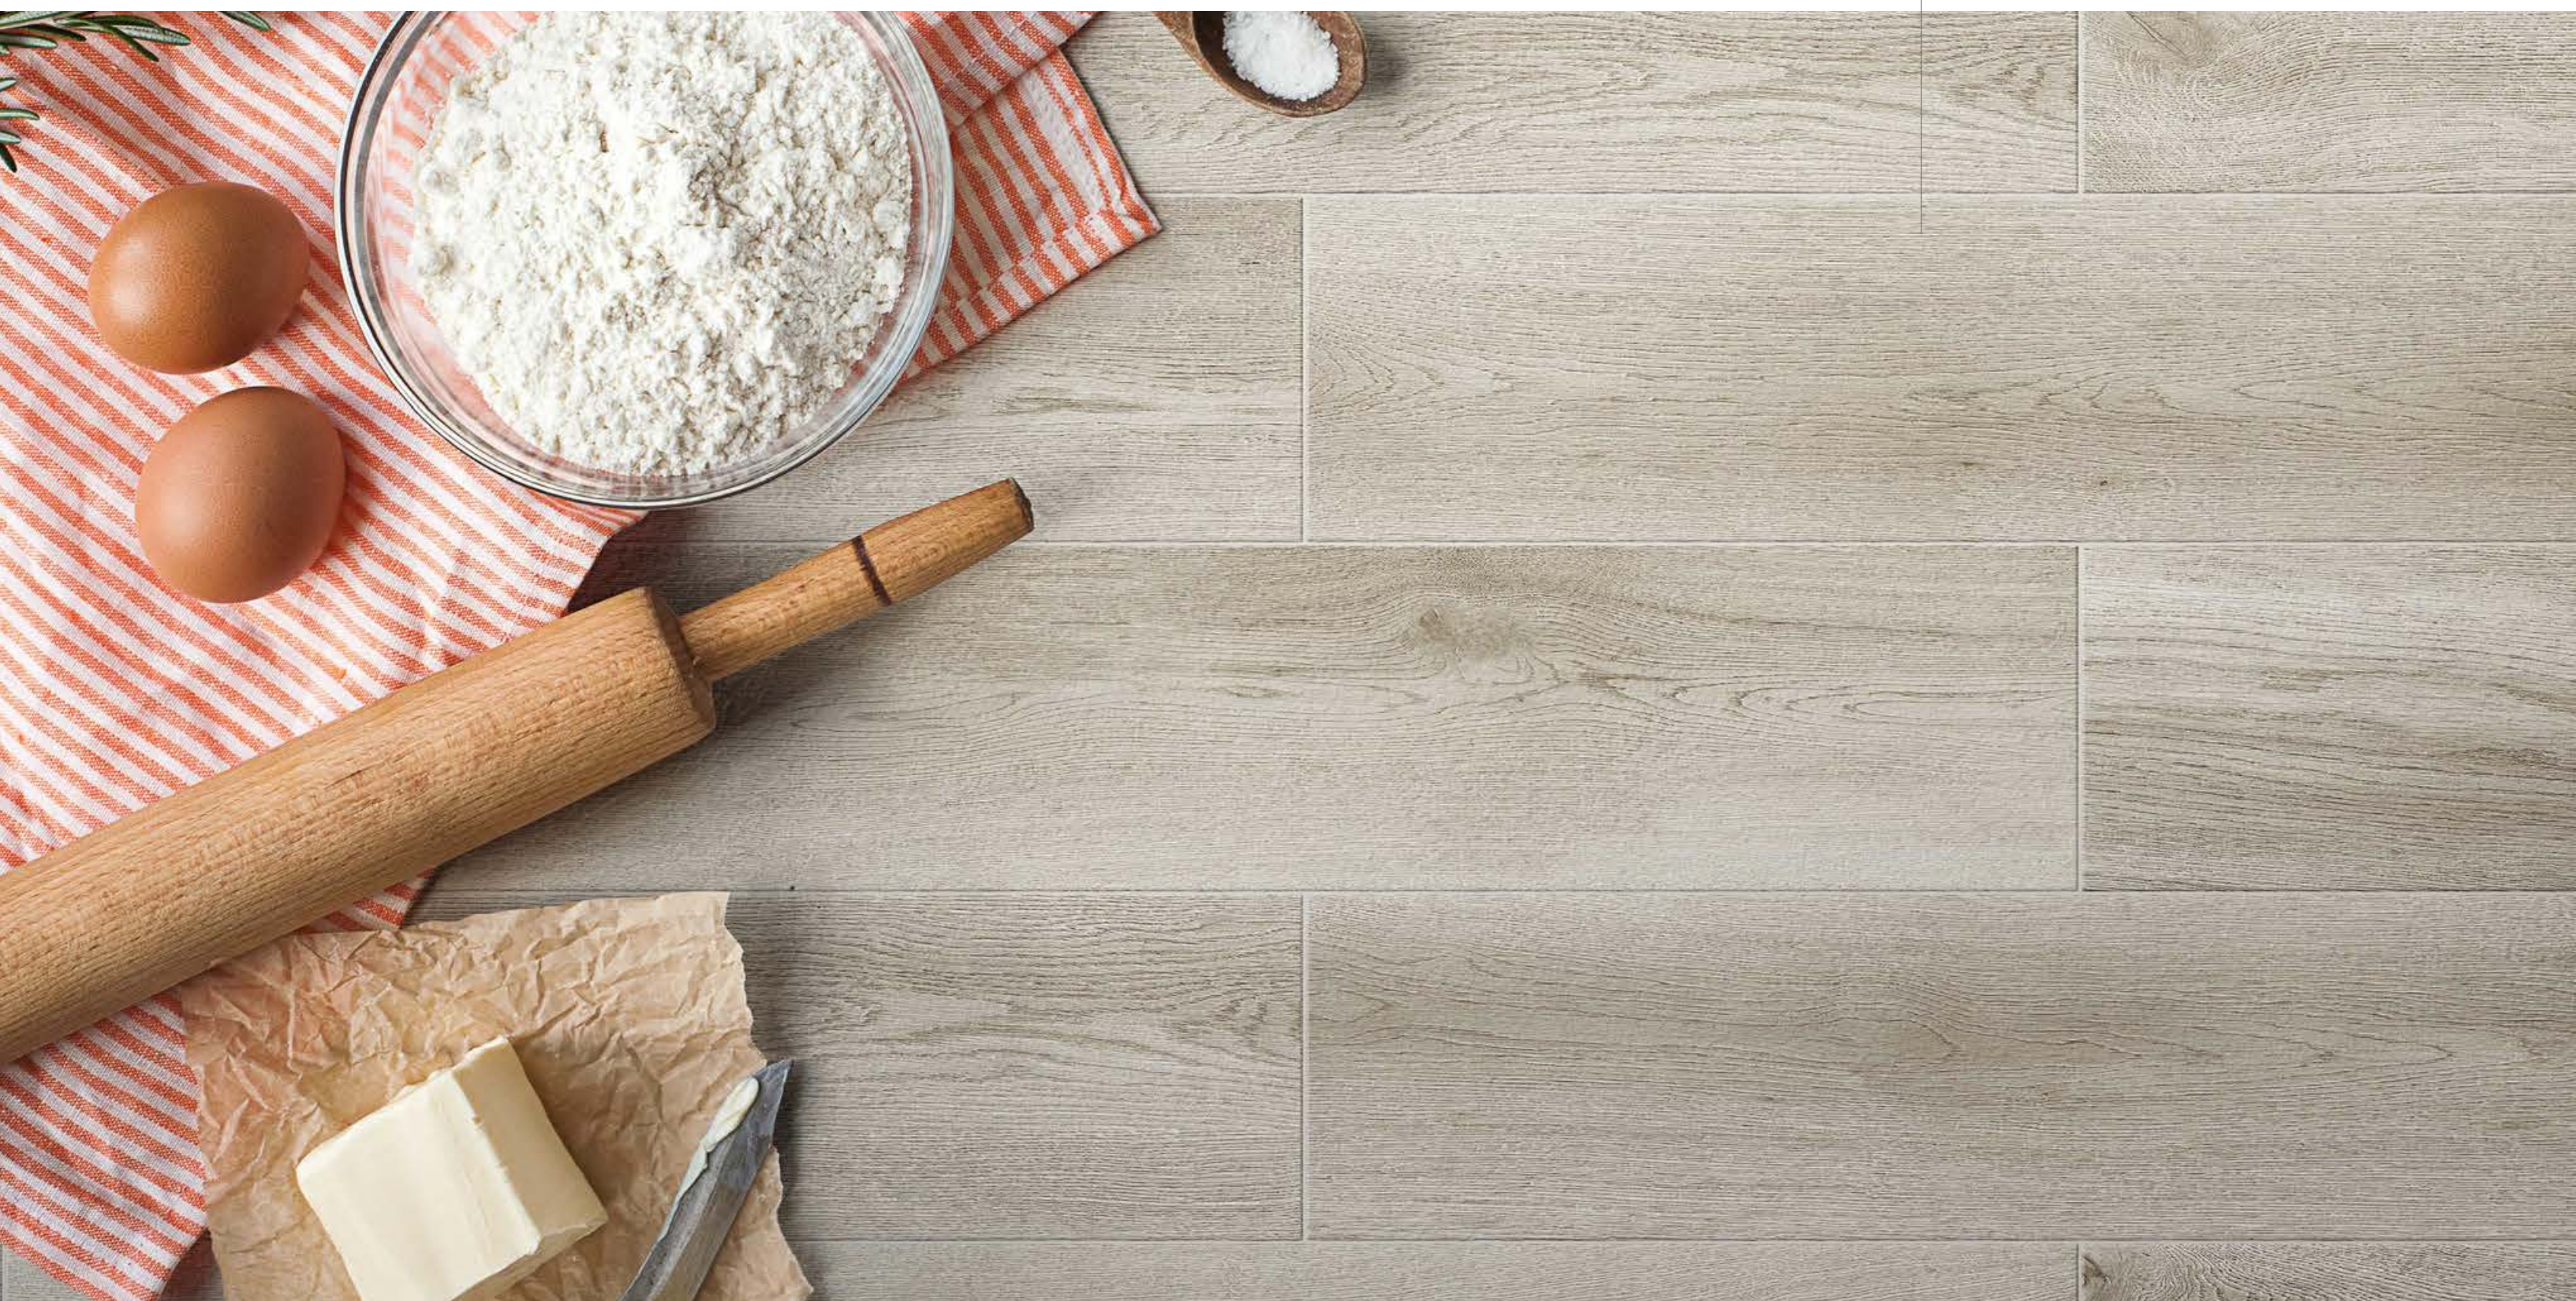



Rovere



Almond







Floor  
R2 | 200x1200mm/8"x48"

Table  
R2 | 200x1200mm/8"x48"












Rovere




Noce



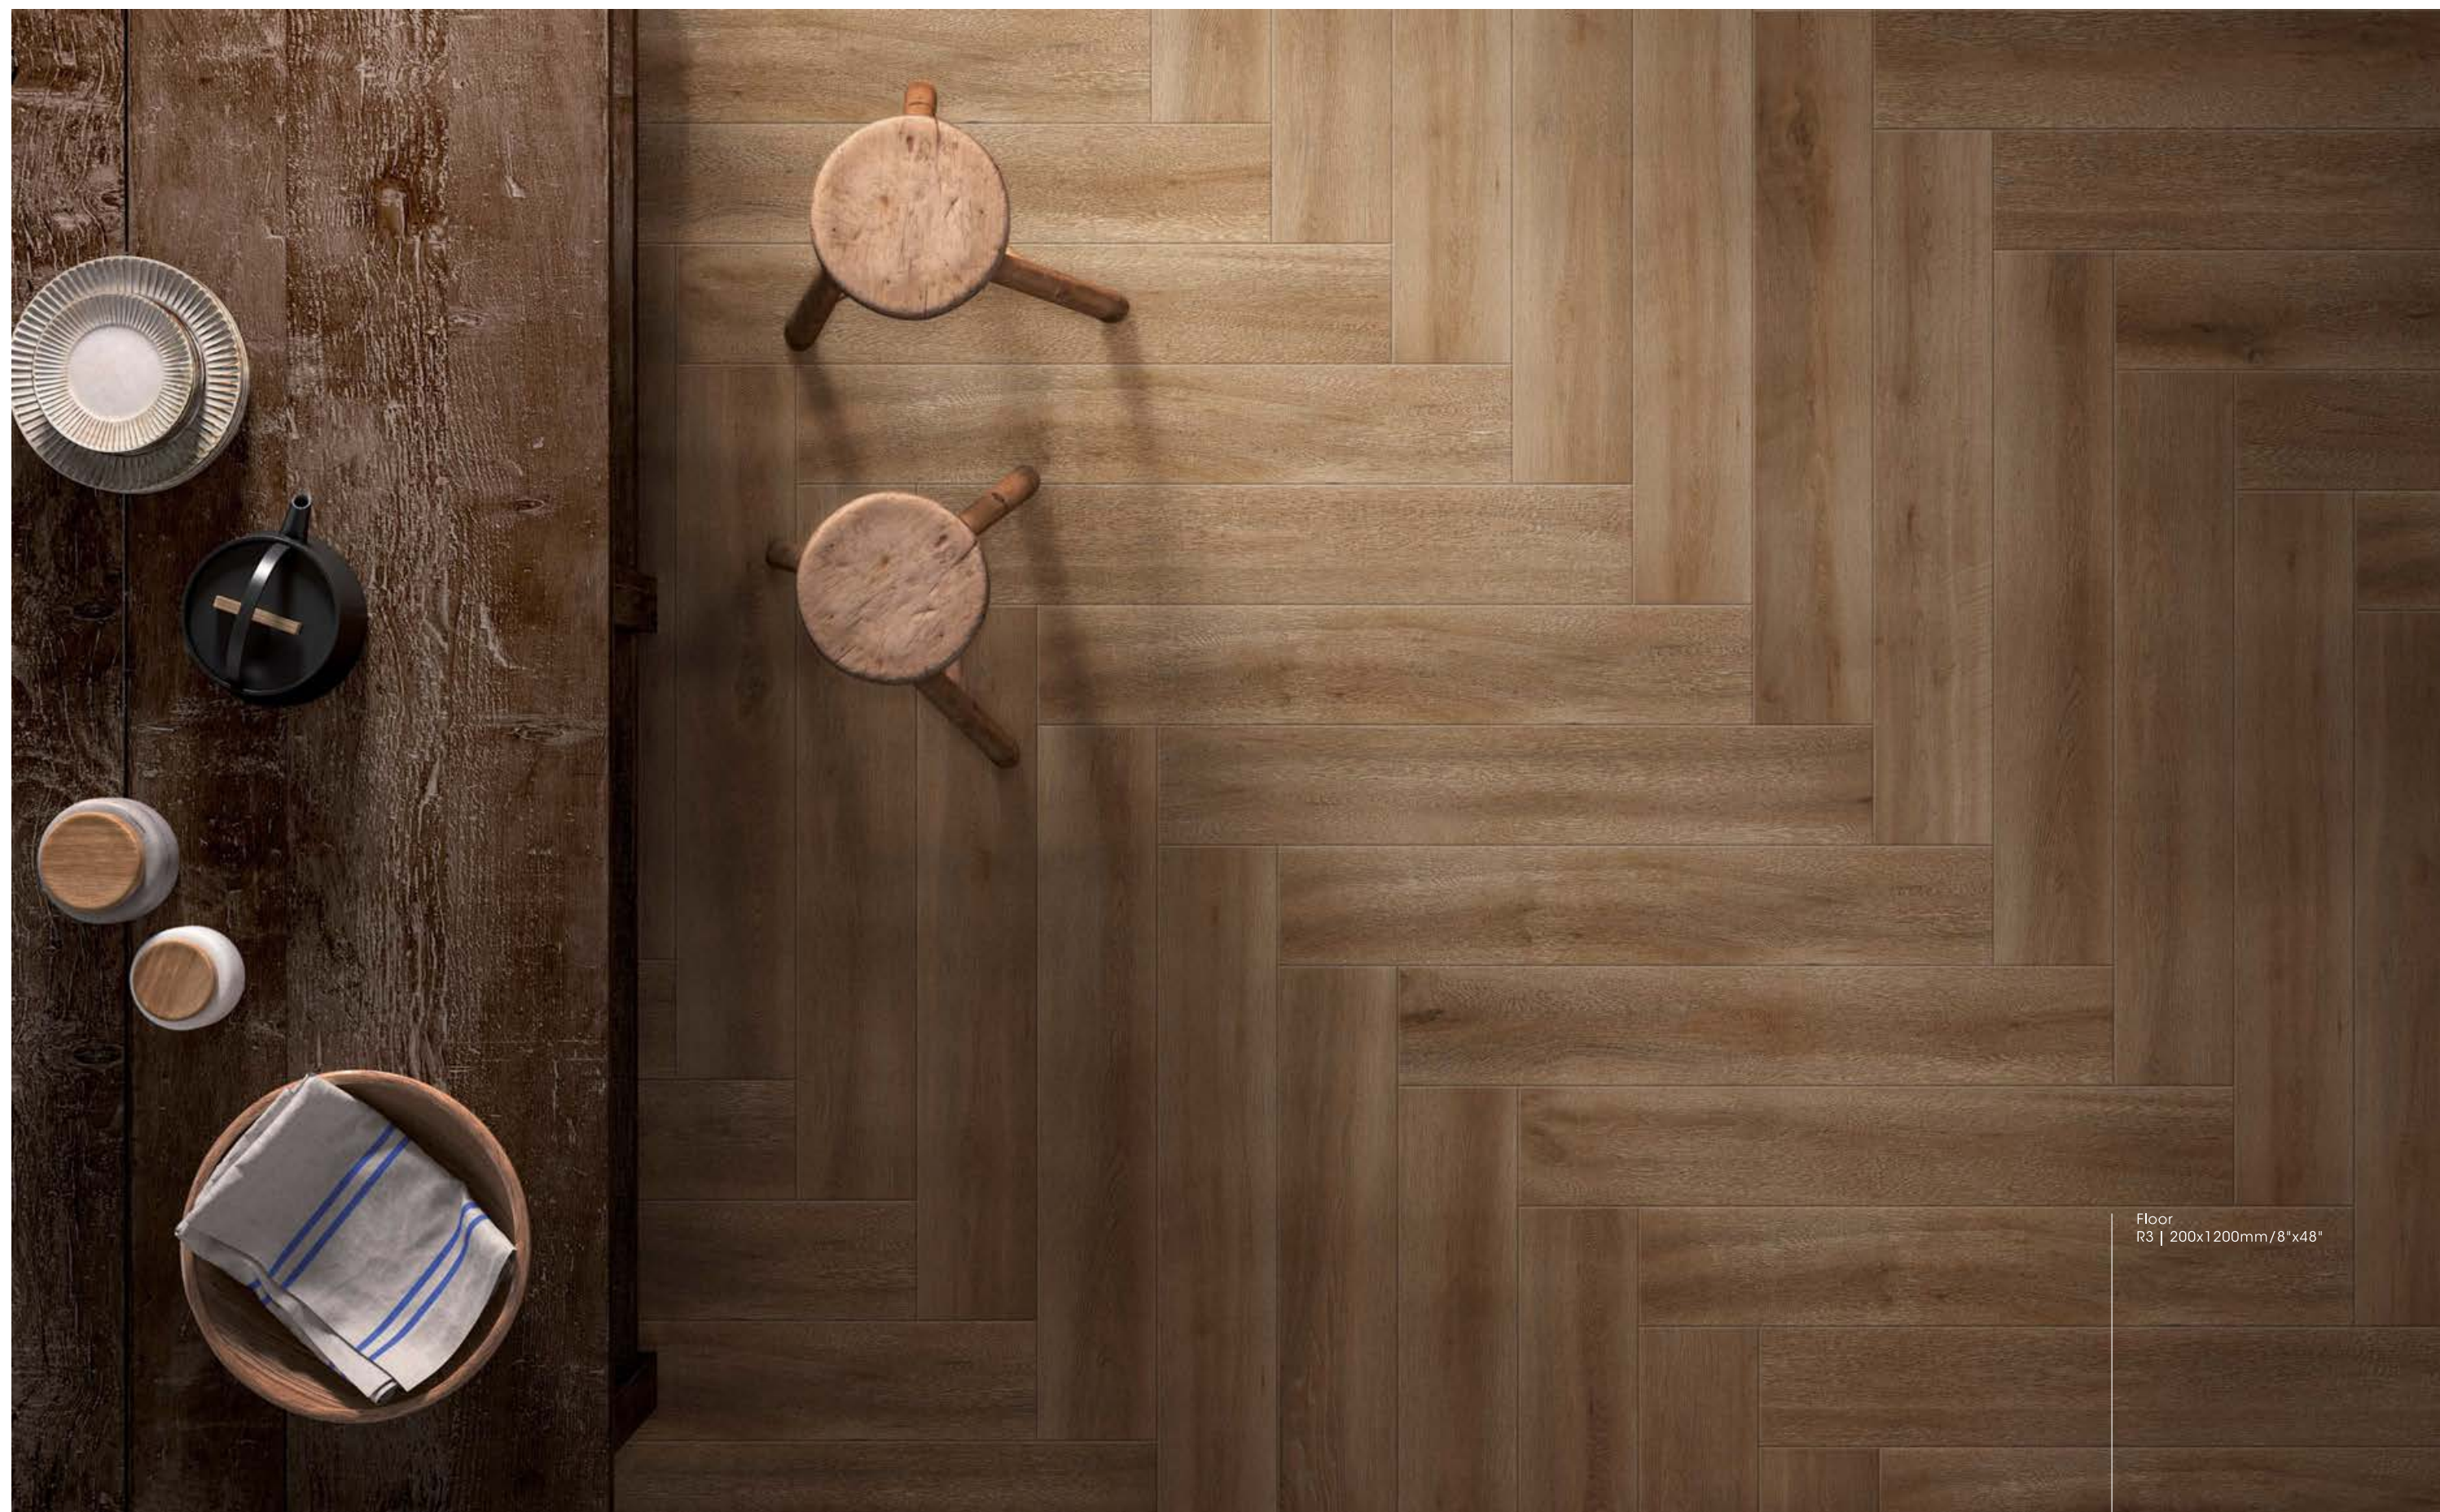



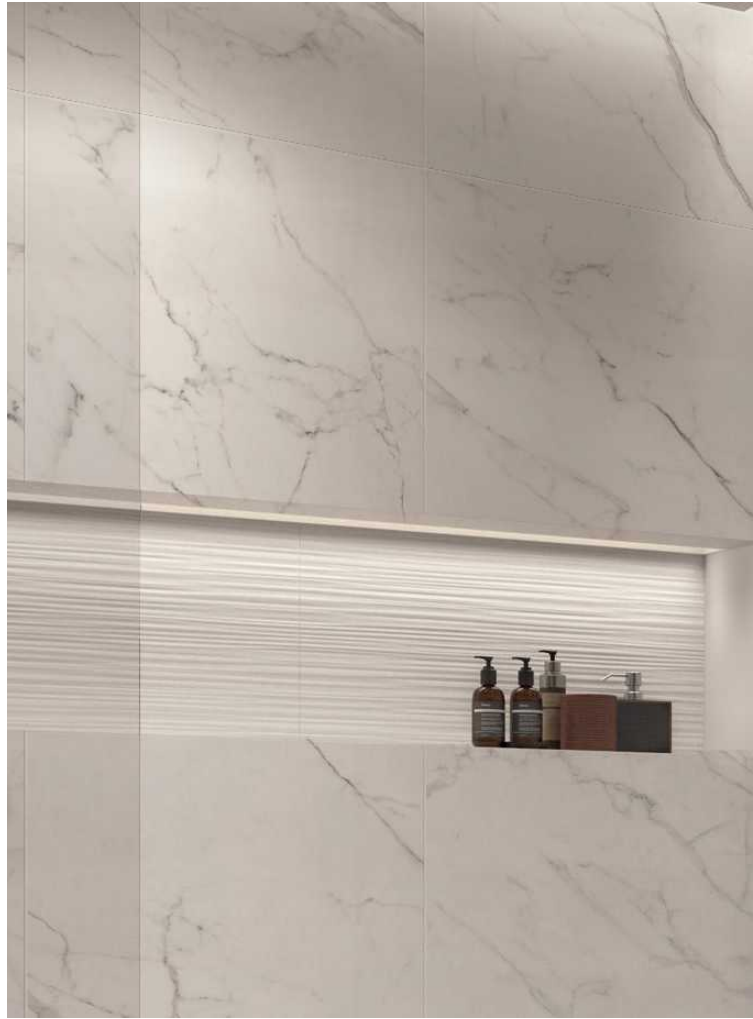

Wall  
 R3 | 200x1200mm/8"x48"  
 MM1 | 600x600mm/24"x24"  
 Floor  
 R3 | 200x1200mm/8"x48"









Rovere



Tobacco









Wall  
P4 | 600x1200mm/24"x48"

Floor  
R4 | 200x1200mm/8"x48"



Wall  
P4 | 600x1200mm/24"x48"







Rovere



Grey
















Bianco  
R1

18 Faces

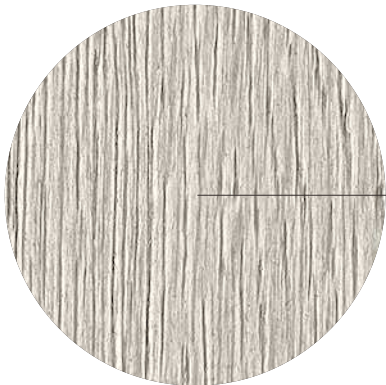

200x1200mm / 8"x48"

Finishes



Matt

Almond  
R2

18 Faces



200x1200mm / 8"x48"

Finishes



Matt



Noce  
R3

18

Faces



200x1200mm / 8"x48"

Finishes



Matt



Tobacco  
R4

18

Faces



200x1200mm / 8"x48"

Finishes




Matt





Grey  
R5

18 Faces

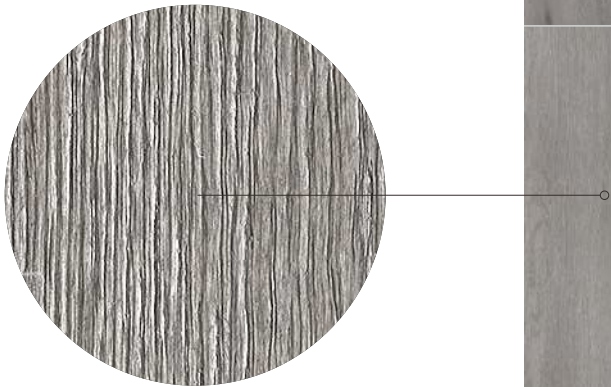

200x1200mm / 8"x48"

Finishes



Matt



Laying  
Proposals

a.

b.

c.

d.

e.

**YES**

**NO  
50%**

3mm

Before laying, it is recommended to check the color number, size and so on, in order to achieve better results; it is suggested that the special joint mixture of Florina tile be used for all products of Florina tile; There shall be a seam for paving, and it is suggested that Florina's products have a 3mm.



Technical Performance

|                                                                                     |                       | TEST METHOD               | INTERNATIONAL STANDARDS       | FLORINA VALUE                                  |
|-------------------------------------------------------------------------------------|-----------------------|---------------------------|-------------------------------|------------------------------------------------|
|    | LENGTH                | ISO 10545-2               | ±0.6%, ±2.0mm                 | ±0.1%, ±1.0mm                                  |
|    | WIDTH                 | ISO 10545-2               | ±0.6%, ±2.0mm                 | ±0.1%, ±1.0mm                                  |
|    | THICKNESS             | ISO 10545-2               | ±5%, ±0.5mm                   | ±1%, ±0.3mm                                    |
|    | SURFACE FLATNESS      | ISO 10545-2               | ±0.5%, ±2.0mm                 | ±0.5%, ±2.0mm                                  |
|    | STRAIGHTNESS OF SIDES | ISO 10545-2               | ±0.5%, ±1.5mm                 | ±0.02%, ±0.1mm                                 |
|    | RECTANGULARITY        | ISO 10545-2               | ±0.5%, ±2.0mm                 | ±0.1%, ±1.0mm                                  |
|    | WATER ABSORPTION      | ISO 10545-3               | Eb≤0.5%                       | Eb≤0.5%                                        |
|                                                                                     |                       |                           | Individual maximum 0.6%       | Individual maximum 0.6%                        |
|   | BREAKING STRENGTH     | ISO 10545-4               | ≥1300N                        | ≥1300N                                         |
|  | MODULUS OF RUPTURE    | ISO 10545-4               | Minimum 35                    | Minimum 35                                     |
|                                                                                     |                       |                           | Individual minimum 32         | Individual minimum 32                          |
|  | STAIN RESISTANCE      | ISO 10545-14              | Minimum Class 3               | Class 5<br>Livello 5<br>Clase5                 |
|  | ABRASION RESISTANCE   | ISO 10545-7               | Report abrasion class         | Class 4                                        |
|                                                                                     |                       |                           | Report cycles passed          | 1500                                           |
|  | FROST RESISTANCE      | ISO 10545-12              | Required                      | Pass                                           |
|  | CRAZING RESISTANCE    | ISO 10545-11              | Required                      | Pass                                           |
|  | SLIP RESISTANCE       | DIN 51130                 | From R9 to R11<br>Da R9 a R11 | Matt R9 - R10                                  |
|                                                                                     |                       | DIN 51097                 | Class A, B and C              | Matt Class B                                   |
|                                                                                     |                       | ANSI A137.1-2012          | Matt µ≥0.42                   | Matt µ≥0.55                                    |
|                                                                                     |                       | AS 4586:2013 Appendix A   | P0 - P5                       | Matt P3                                        |
|                                                                                     |                       | GB/T 4100-2015 Appendix M | µ≥0.5                         | Static friction coefficient of floor tile ≥0.5 |

Packing Information

| Florina<br>CERAMICS  |         |         |        |            |            |           |
|----------------------|---------|---------|--------|------------|------------|-----------|
| FORMAT(mm/in)        | PCS/BOX | SQM/BOX | KG/BOX | BOX/PALLET | SQM/PALLET | KG/PALLET |
| 200x1200mm<br>8"x48" | 6       | 1.44    | 42     | 30         | 43.2       | 1260      |



@FlorinaCeramics



 [www.florina.cn](http://www.florina.cn) | [info@florina.cn](mailto:info@florina.cn) | 400-999-9394