

SPECIFICATION

Modular vinyl floor covering, with glass fibre reinforcement(**click). Polyurethane reinforcement. In tile format, with bevelled edges. Product standard: EN ISO 10582.

CERTIFICATION & CLASSIFICATION	STANDARDS	LOOSE LAY
		0.55mm
Type of floor covering	EN ISO 10582	Compact resilient floor covering
CE certification	EN 14041	Yes
Classification	EN ISO 10874	Residential: 21
		Commercial: 32
		Industrial: 42

TECHNICAL PERFORMANCES	STANDARDS	LOOSE LAY
		0.55mm
Dimensional stability	EN ISO 23999	≤ 10 %
Reaction to fire	EN 13501-1	Bfl s1 on concrete and Cfl s1 on wood substrate
Residual indentation	EN ISO 24343-1	≤ 0.10 mm
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918	No damage visible after 25000 revolutions
Curl resultant to heat	EN ISO 23999	-
Underfloor heating	EN ISO 10456	Suitable – max. 27°C
Thermal resistance	ISO 10456	0.04 m2 K/W
Impact sound reduction	EN ISO EN 717-2	ΔLw = 8 dB
Reduction of in room impact noise	ASTM -1989-12	Class II
Light fastness	EN ISO 105-B02	≥ 6
Resistance to chemicals	EN ISO 26987	High resistance
Slip resistance	EN 13893	μ ≥ 0.30
	DIN 51130	R9
Electrical properties	EN 1015	≤ 2kV on concrete
	EN 1081	> 109 Ω
Adhesion wear layer	EN 431	≥ 50N / 50mm

PACKING


	Loose Lay
Tile Size	9x59 inch
	228.62x1498.6mm
Thickness	5.0mm
Weight/Box	21kg
Wear Layer	0.55mm
Pcs/Box	6
Sqm/Box	2.06
Box/Plt	36
Plt/Cntr	28



ADD: Calle La Cosa 18 12200 ONDA Castellón-España
 TEL: +34 964 603 425 FAX: +34 964 602 688
 WEB: www.maxifloor.es http://goo.gl/YD1i8d

CAPPUCINO
 228.62x1498.6mm / 9x59 inch



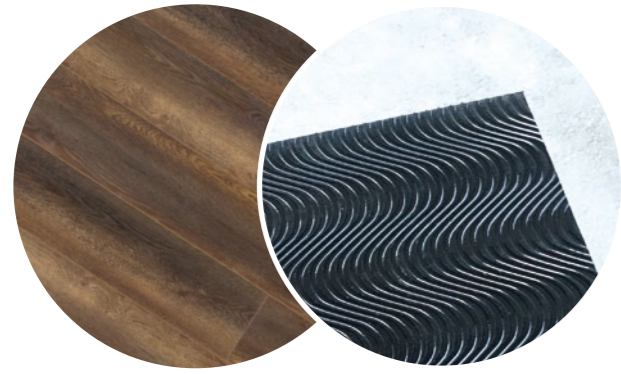

STARBUCKS

NEW COLLECTION
LOOSE LAY

5 COLOURS / 1 SIZES


LOOSE LAY
228.62x1498.6mm / 9x59 inch



LATTE




MACHIATO

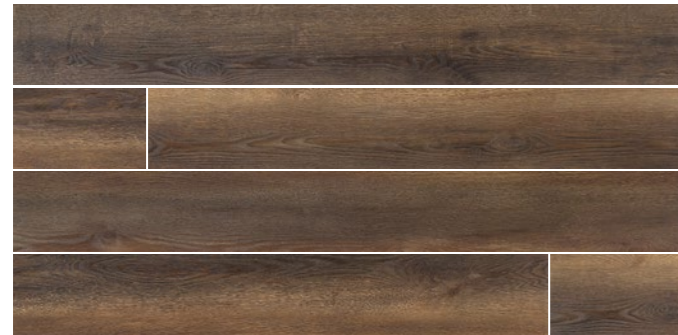

CAPPUCINO



SCURA

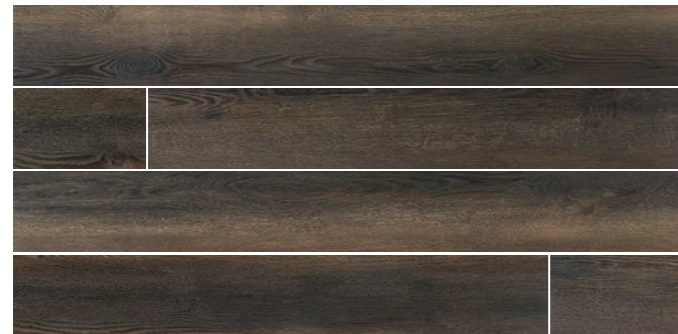

AMERICANO



Discover easy renovation with the loose lay vinyl planks and tiles in The Maxifloor Loose-Lay Collection. This gorgeous flooring contains tiles and planks with wear classifications 33 and 42, (which enable its usage in a wide range of space), including commercial and industrial applications, like offices, banks, high street retail, coffee shops, homes Care Centers and hospitals,

In addition, the loose lay vinyl planks and tiles in the Maxifloor Loose-lay collection possess numerous technical qualities and features. For example, these vinyl tiles and planks have a Bfl-s1 fire rating, they are slip-resistant, and can endure a high amount of traffic. These qualities are complemented by features such as resistance under office chairs with castor wheels and good impact sound absorbtion.

The loose lay vinyl plank & tile flooring has a total thickness of 5 mm, with a 0.55 mm PUR wear layer, hence its high durability, resistance to wear and tear, provides supportive & warmer underfoot comfort, excellent acoustic properties, & most important of all that they are incredibly easy to clean and maintain.

MAXIFLOOR LOOSE-LAY

The Maxifloor Loose-Lay Collection can be easily installed on top of almost any surface. Thanks to the loose lay system, the product can be easily removed and replaced.

The Maxifloor Loose-Lay Collection contains a fiberglass reinforcement layer through out for superior stability.

Maxifloor is backed up by a 15 year residential and a 7 year commercial manufacturer's warranty.

The Maxifloor Loose-Lay Collection (The product)do not contain any harmful fillers and plasticizers and are free of VOC emissions and formaldehyde most important of all they are 100% recyclable.

The Maxifloor Loose-Lay Collection provides you with a wide variety of natural or abstract wood designs in a plank format, and stone and mineral looks in a tile format. For instance, the wood range contains light to dark shades, natural to extravagant looks, and rustic to urban feels, so you can instantly modernize any space, or simply transform it into a homely feel.

Come & Experience unlimited design possibilities and get inspired by the Maxifloor's Loose-Lay vinyl planks and tiles.